



240X双柱举升机 (出口型)

240X Two Post Lift (For Export)

技术参数 Technical Data

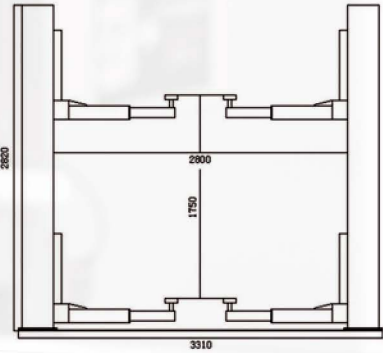

立柱高度	Overall height	2820mm
举升重量	Lifting capacity	4000KG
举升高度	Lifting height	1750mm
升降时间	Lifting time	45-60s
电压	Pouer	220v/380v
驱动方式	System	电动液压 / Electric hydraulic
整机重量	Net.weight	570KG

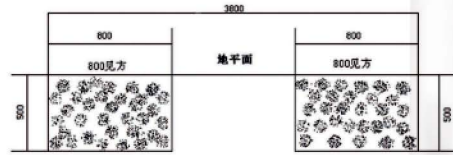

产品特点 Product Features

双柱举升机是一种比较先进的汽车保养设备，主要用于4000公斤以下的各种小型汽车的快速修理及保养，替代了旧式地沟修理的缺点，具有占地小、投资少、效率高的优点，是现代汽车修理行业的理想维修设备。

- 1、立柱采用足5.4mm厚钢板，立柱不扭曲，不变形，安全性能高。
- 2、采用高品质油缸，油缸质保3年，质保期内泄压漏油免费换新的。
- 3、传动链条采用单根121节4×4盾牌链条，国家知名品牌世界免检产品。
- 4、动力单元采用纯铜芯电机国际知名品牌，延长使用寿命。
- 5、保险锁上升时自动上锁，保证上升时的安全可靠。

Two post lift is relatively advanced vehicle maintenance equipment, mainly used for the following 4000kg of various small car rapid repair and maintenance, replacing the old trench repair shortcomings, with an area of small investment. Of the advantages of modern auto repair industry is the ideal maintenance equipment.


1. Column height of 5.4mm thick steel plate, column is not distorted, no deformation, high safety performance.
2. The use of high-quality fuel tank, cylinder warranty
3. Transmission chain with a single 121 4 × 4 shield chain, the world famous brand-free products in the world.
4. Power unit uses pure copper core motor international famous brands, long service life.
5. When the security lock is locked, it is automatically locked to ensure the safety and reliability .

240X双柱举升机 (出口型)


240X Two Post Lift (For Export)

● ● ● 颜色可选


 保险公司承保

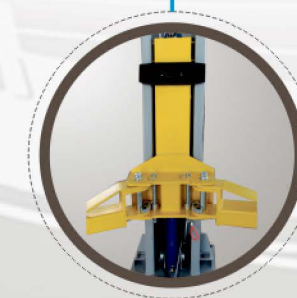

板式结构
STRONG CARRIAGE AND
AMR STRUCTURE

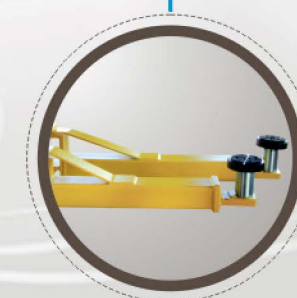

抽拉支臂、可调节螺旋托盘
ROUND SCREW-UP LIFTING PAD
AND STRAIGHT ARM

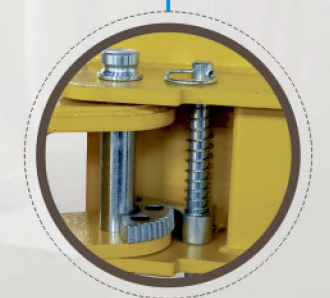

支臂安全锁
ARM LOCK SYSTEM