


6245Z超薄子母剪式举升机

6245Z Ultra-thin scissor lift

技术参数 Technical Data

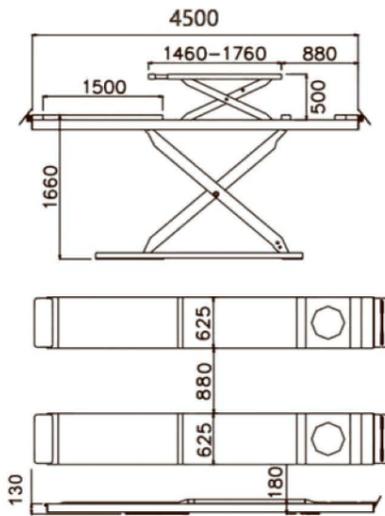

举升能力	Lifting capacity	4000KG
举升高度	Lifting height	1800mm
举升时间	Lifting time	≤75s-20s
平台长度	Platform length	4500mm
平台宽度	Platform Width	660mm
电机功率	Motor power	3KW
落地高度	Floor height	180mm
气源压力	Air supply pressure	6-8KG/cm
整机重量	Weight	2380KG

产品特点 Product Features

- 1.超薄式双层子母结构，降低时厚度只有180mm。
- 2.意大利技术设计制造。
- 3.整机6油缸设计，液压同步，双液压系统，液压锁和机械三重保险装置，下降自动解锁。
- 4.24V安全控制电器。
- 5.桥板采用整板折弯焊接而成，更精密，更牢固。
- 6.油缸部件采用高转速全自动CNC数控车床加工而成，保证了优秀的同心度和光洁度，缸桶滚压镜面处理。
- 7.日本密封件，意大利球阀，装有液压防爆装置。
- 8.采用激光等数控设备切割，尺寸精确，切口平整，光洁度高。
- 9.X架采用优质合金钢，激光切割而成，实心钢板，强度高，耐腐蚀，不易变形。
- 10.液压系统采用先进的集成阀板油路和进口密封件。
- 11.所有轴的位置均有耐磨轴承，高分子耐磨滑块。
- 12.动力单元采用纯铜芯电机国际知名品牌。

Super low profile and perfect for ground mounted; Suitable for any alignment turntable. The main hydraulic components of the machine are assembled by international high quality imported parts, which is double-tooth, hydraulic and electrical triple protection, safe, reliable and stable running. This machine is composed of three parts: main body plate, hydraulic system and electrical system.

1. Electric unlock, safety and reliable.
2. Hydraulic system uses advanced integrated valve plate oil and imported seals.
3. Power failure can also be used manually to the safety of vehicles dropping out.
4. Cylinder 2-year warranty, quality assurance period of pressure relief oil free replacement cylinder.
5. Power unit using pure copper core motor international famous brands.
6. The use of hidden scissors super Low structure, no construction pit, small footprint.

QTY-6245Z超薄子母剪式举升机

QTY-6245Z Ultra-thin scissor lift

● ● ● 颜色可选


 保险公司承保



助力装置



加粗油缸，动力更强力
USE A MORE ROBUST CYLINDER
TO ENSURE MORE
POWER AND SERVICE LIFE



人性化可移动扣盒